

▶ **SPEED**

Speeds available up to 60 inches per second.

▶ **CONTROLS**

The ACS-50 is NEMA-4 rated and CUL listed. LED indicators make troubleshooting simple. Includes self-testing and self-monitoring safety features.

▶ **VISIBILITY**

UltraLite™ offers full width vision standard.

▶ **PANEL MATERIAL**

Vinyl material is standard in blue with two ply and three ply monofilament optional.

▶ **MAINTENANCE**

The self-repairing UltraLite™ is designed to be low maintenance and cycle hundreds of thousands of times.

▶ **LOW PROFILE**

Projects less than four inches from the wall with side clearance of less than seven inches required.


Albany Door Systems' self-repairing and low profile UltraLite™ high speed door is ideally suited for industrial and commercial applications where traffic conditions are moderate and space is at a premium. The door can be applied in either interior or exterior applications where moderate wind and/or negative pressure are a problem. The Albany UltraLite™ is designed to last. It is fast, safe, low cost to maintain and can take a hit.



Photo shown includes additional options.

ULTRALITE™

Albany's self-repairing UltraLite™ high speed industrial doors are tough, built to last, and engineered to cycle hundreds of thousands of times.

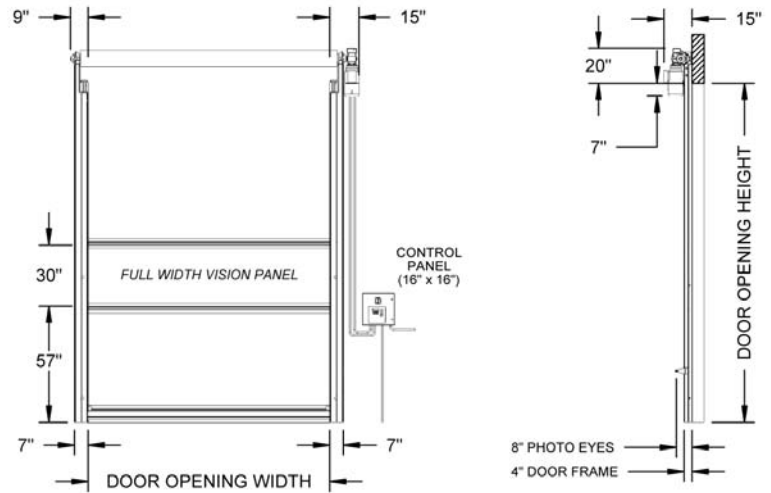

BacFlap™ Auto-Reset System

When impacted the door panel can be reset without tools. BacFlap™ insure against panel tearing.




ACS-50 Controller

The ACS-50 is NEMA-4 rated and CUL listed. LED indicators make troubleshooting simple. Includes self-testing and self-monitoring safety features and a rotary disconnect on the enclosure cover.




UltraSmart™ Controller (Optional)

UltraSmart™ increases opening speed up to 60 inches per second. Troubleshoot problems using the digital display on the control screen. Modular design minimizes cost, improves reliability, and offers scalability for future upgrades.



Patent Pending Modular Design

The Albany patent pending extrusion design allows for easy maintenance and repair in the field.




BacTrack™ Soft Bottom Bar (Optional)

Fully padded safety bottom bar that automatically resets after impact. Self-repairing.



BacSeal™ Weather Seal

Double seals are used on the header and front extrusions. When the door is down, the panel is sealed.



Low Profile

Projects less than four inches from the wall with side clearance of less than seven inches required.