




TOP VIEW

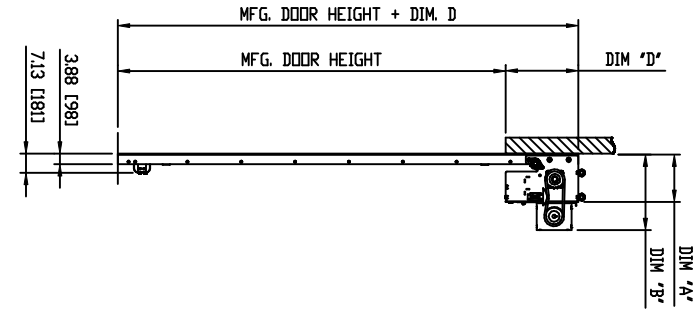

LEFT VIEW

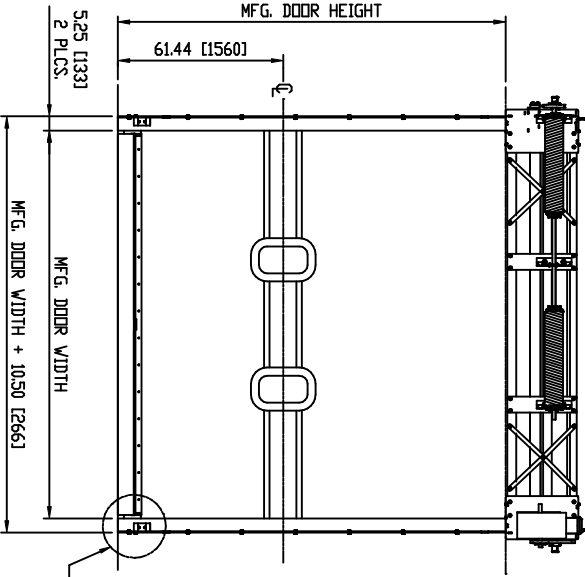

FRONT VIEW

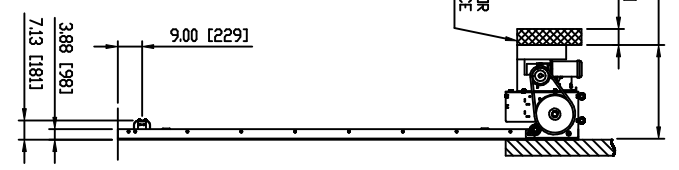


RIGHT VIEW

NOTE:
A. DIMENSION DETERMINED BY DOOR SIZE
CONTACT FACTORY IF REQUIRED

SPECIFICATIONS & OPTIONS

OPENING SIZE	W=	H=
MFG. DOOR SIZE	W=	H=
OPERATOR LOCATION	RIGHT-HAND DRIVE	
OPERATOR LOCATION	LEFT-HAND DRIVE	
OPERATOR SPEED	1 SPEED	STD.
PRIMARY VOLTAGE (3 PHASE)	208 - 240 V	
	440 - 480 V	
	550 - 600 V	
DOOR ACTUATOR (Quantity)	OPEN/CLOSE/STOP	
	PUSH BUTTON(s)	
	PULL SWITCH(s)	
	FLOOR LOOP RECEIVER	
	PHOTOCELL	
	MOTION DETECTOR(s)	
	RADIO CONTROL	
BALANCING	BALANCED - 50 K CYCLES	STD.
	BLACK SBR. (STD.)	
FABRIC	GRAY EPDM.	
	BLUE EPDM.	
WINDOWS 10" W X 18" H	QTY.	
Comments:	(QTY. DETERMINED BY MFG. DOOR WIDTH)	



DETAIL "B"

TABLE 'A'

DOOR SIZE	DIM. A	DIM. B	DIM. C	DIM. D
DH & DW < 12'-0"	19.25 [489]	30.25 [768]	34.70 [881]	27.00 [686]
DH OR DW > 12'-0"	26.75 [679]	37.75 [959]	45.62 [1159]	33.50 [851]

RE-COIL-AWAY L

CUSTOMER:	
LOCATION:	
DEALER/SALESMAN:	
DOOR #:	
DATE:	
APPROVED BY:	
APPROVED WITH CHANGES AS NOTED BY:	

Rev	Change	Date	Name

Tolerances according to ANSI Y 14.5 unless otherwise noted
 X=±0.1 Fractions = 1/32
 XXX=±0.005
 <=±0.5°

Scale: DRAWING SCALE Surface treatment: Weight: kg/St Material Spec: Model: Description: RE-COIL-AWAY L

Designer: jcr. Date: 6-8-16 Released: XXX=±0.005

ALBANY DOOR SYSTEMS

Drawing No: RCA-0018 Sheet 1 of 1